

SYMMETRIC

DESCRIPTION

Fusion Optix Advanced Diffusion Films are based upon patented core technology, based upon deep roots in optical and material sciences.

Advanced Diffusion Films are available in a broad range of diffusion properties and lighting distributions, ranging from weak to strong diffusion, symmetric, and asymmetric profiles. Along with the optical properties, key mechanical properties are also controlled, including thickness, surface finish, and material.


All products are available in rolls or sheet and in a variety of other converted form factors.

Typical Benefits:



- High Transmission/Low Insertion Losses
- LED/Lamp Obscuration
- Luminance Uniformity
- Color Mixing
- Beam Spread
- Durability

APPLICATIONS

- LED Downlights
- LED Pendants
- LED Bulbs
- LED Lamps
- LED Light Boxes
- LCD Backlight Units
- Machine Vision Lights

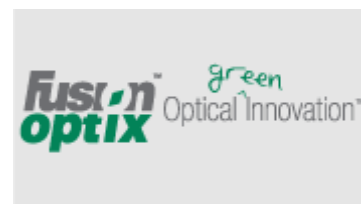

OPTICAL PROPERTIES

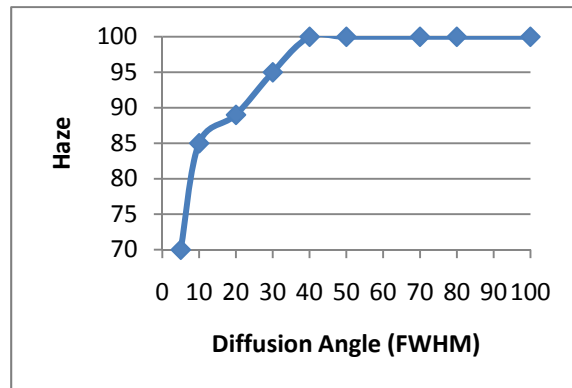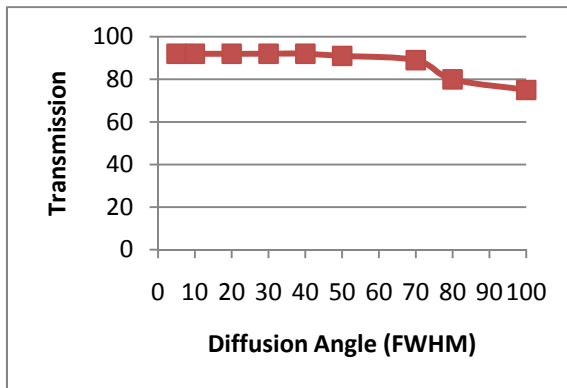

Low – Medium Angle

Characteristic	Unit	Performance Options					
		0505	1010	2020	3030	3535	4040
FWHM Angle (589nm)	X°	5	10	20	30	35	40
FWHM Angle (589nm)	Y°	5	10	20	30	35	40
Transmission	%	92	92	92	92	92	92
Haze	%	70	15	95	99	99	100
Clarity	%	25	15	4.0	3.0	3.0	2.9
Relative Intensity/Gain	%	4.7	4.6	4.5	4.4	4.2	3.9
ΔCCT (3100K)		-300	-405	-510	-320	-300	-620
u' Color Point w/3100K LS		0.258	0.268	0.279	0.279	0.258	0.274
v' Color Point w/3100K LS		0.524	0.528	0.532	0.533	0.524	0.531
Film Thickness	in	0.002"	0.004"	0.006"	0.008"	0.009"	0.010"
Film Thickness	um	50	100	150	200	225	250

High Angle

Characteristic	Unit	Performance Options					
		5050	6060	7070	8080	9090	100100
FWHM Angle (589nm)	X°	50	60	70	80	90	100
FWHM Angle (589nm)	Y°	50	60	70	80	90	100
Transmission	%	91	89	85	80	78	75
Haze	%	100	100	100	100	100	100
Clarity	%	2.8	2.7	2.5	2.2	2.4	2.6
Relative Intensity/Gain	%	3.9	3.9	3.5	3.1	3.0	2.9
ΔCCT (3100K)		-595	-570	-540	-520	-520	-300
u' Color Point w/3100K LS		0.273	0.271	0.270	0.269	0.264	0.258
v' Color Point w/3100K LS		0.531	0.530	0.529	0.528	0.526	0.524
Film Thickness	in	0.012"	0.014"	0.016"	0.018"	0.020"	0.022"
Film Thickness	um	300	350	400	450	500	600

MATERIALS SELECTOR

Characteristic	Unit	Material System		
		PMMA	PC	PETG
Density	g/cm ³	1.17	1.20	1.32
Refractive Index		1.491	1.584	1.568
Pencil Hardness		HB	HB	HB
Flammability (0.2mm)		94HB	94HB	94HB
Operating Temp	°C	-30 to 90	-30 to 120	-30 to 65
UV Resistance		Good	Poor	Poor
Water Absorption		0.3	0.3	0.3
Key Benefits		Transmission, color, UV	Thermal range, durability	Thermoforming, low birfringence

VISUAL INSPECTION CRITERIA

Properties	Criteria	Specification
Dark Point Defects- Inclusions	D < 0.3 mm	Unlimited
	0.3mm < D < 0.5mm	2 max / pc
	0.5mm < D	none
Clear Point Defects - Gels, Pits	D < 0.7mm	Unlimited
	0.7mm < D < 1.5	2 max / pc
	1.5mm < D	none
Linear Defects – Fiber/Scratch/Die Line/Flow Line	Width < 0.03 and Length < 3mm	Pass
	0.03mm < Width < 0.10 mm and Length < 2mm	Pass
	Width > 0.1mm	Justify as point defect
Large Area Effects - Ripples/Blotches	Grade in comparison to selected defect samples	Equal to or better than approved sample.

PRODUCT RELIABILITY

Fusion Optix Advanced Diffusion Films have been designed to be used in a wide variety of LED lighting applications. The products are tested using the following accelerated tests.

	<u>Outdoor</u>	<u>Indoor</u>
Equipment	QUV chamber	QUV chamber
Test Method	ASTM G154 Cycle 1	Custom
On Cycle	8hr @ 60°C, ~ 95% humidity	Continuous 50°C, ~ 95% humidity
Off Cycle	4hr @ 50°, 100% humidity (condensation)	-
UV Lamp	UVA-340nm	UVA-351nm
Irradiance	0.89 W/m ²	0.50W/m ²

Notes:

1. Outdoor cycle simulates Florida outdoor sunlight exposure.
2. Indoor cycle simulates UV from sunlight filtered through window/skylight glass.
3. Standard Sample size is 2"x3"

QUALITY ASSURANCE

Fusion Optix products are manufactured using tightly controlled, high volume production processes. We adhere to the strictest quality and process control standards which allows us to provide customers with a dependable supply of parts. The company is fundamentally organized to carefully validate, control, and continuously improve both internal and supplier processes to meet or exceed customer expectations. Every Fusion Optix employee is encouraged, expected, and supported to make quality leadership the highest priority.

QUALITY STATEMENT

Fusion Optix delivers innovative, reliable products and services by working closely with customers to anticipate and verify requirements for component and system performance, delivery time, and cost.

Quality assurance capabilities include state-of-the art test equipment and processes to specify measure the complete range of optical, physical, and environmental film characteristics. Fusion Optix also develops custom quality assurance procedures for custom products. We also help our customers achieve ratings UL and EnergyStar, by understanding requirements and developing products accordingly.

HANDLING & STORAGE

Advanced Diffusion Films do not contain any delicate surface features or embossed coatings that present restrictive handling concerns. In handling Advanced Diffusion Films, the same level of care should be exercised as in handling clear PMMA, PC or PETG film of similar gauge. Gloves should be used to prevent fingerprints and other surface contaminants. The product should not be bent, flexed, or twisted as white stress marks may appear in the plastic. Product should be stored lying flat on shelves, covered or sealed to prevent contamination.

ENVIRONMENTAL CONSIDERATIONS, REQUIREMENTS & DISPOSAL

Lead free, mercury free, cadmium free, hexavalent chromium free, polybrominated biphenyls free, and polybrominated diphenyl ether free manufacturing processes are used. Advanced Diffusion Films can be recycled in large quantities and through most standard municipal recycling programs.

ORDERING INFORMATION

For ordering information on products from Fusion Optix, please call: **1-781-995-0805**

For technical information please send an e-mail to:
sales@fusionoptix.com



Optical Innovation™

Fusion Optix, Inc. • 19 Wheeling Avenue • Woburn,
MA 01801 • T: +1 781.995.0805 • F: +1 781.995.0803
sales@fusionoptix.com • www.fusionoptix.com

Important Notice to Purchaser

The following is made in lieu of all warranties, express or implied, including any implied warranties of merchantability or fitness for a particular purpose.

Fusion Optix warrants that, at the time of shipment, product will meet Fusion Optix's published specification or that specification agreed in writing between Fusion Optix and purchaser. Should product not meet specifications at time of shipment, Fusion Optix will replace or refund the purchase price of such quantity of the product found not to meet specifications. Purchaser shall determine the suitability of the Fusion Optix product for purchaser's application. Fusion Optix shall not be liable under any legal theory, including in contract or in tort, for any injury, loss, or damage, whether direct, indirect, incidental, special or consequential, arising out of the use of or the inability to use the product.

The warranties and remedies set forth herein are purchaser's sole and exclusive warranties and remedies.